




Datasheet

Geo 3 LED Recessed ceiling luminaire

2001.4135

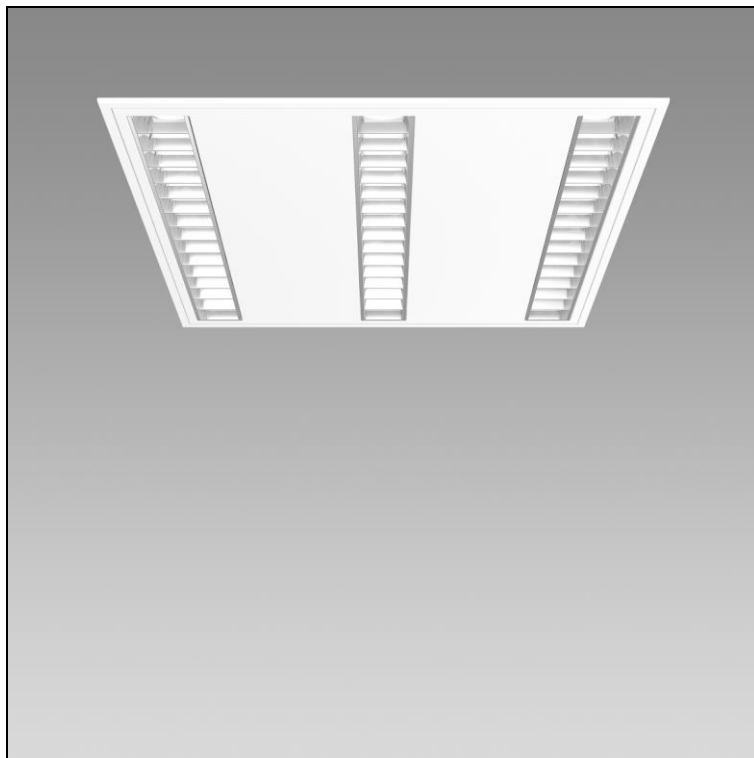

| | | |
|-------------------------------|----------------------------|--|
| System power | 23 W | <p>Recessed ceiling luminaire Geo 3 LED 3 lamps, with LED (Light Emitting Diode), system power: 23 W, luminous flux of luminaire 3300 lm, CRI >80, 4000 K, neutral white, SDCM 3, L80 (B10) 50'000h, max. 3000 cd/m², 230 V, direct light emission, housing in steel sheet white powder coated, specular louvre in aluminium brilliant polished, 1 integral control gear, DALI, Regent certified MINERGIE®-Modul luminaires S.A.F.E. 2019 (Re-0315), luminaire complies with the strict requirements for Minergie-certified luminaires (101 lm/W)</p> <p>protection class I, ingress protection IP20 / IP40, glow wire test 850 °C, impact strength: IK 07 module 625, L = 620 mm, B = 620 mm, EL = 601 mm, EB = 605 mm, ET = 70 mm</p> |
| Source of light | LED (Light Emitting Diode) | |
| Colour temperature | 4000 K | |
| Luminaire flux | 3300 lm | |
| Ingress Protection | IP20 / IP40 | |
| Colour Rendering Index | CRI >80 | |
| UGR C0 4H/8H | 16.1 | |
| UGR C90 4H/8H | 18 | |
| Economic life-time | L80 (B10) 50'000h | |
| Light control | DALI | |
| Finish | white | |
| Weight | 5.067 kg | |