




Datasheet

Purelite D C-LED Ceiling and wall mounted luminaire

1022.3755

58H3D212L3JC

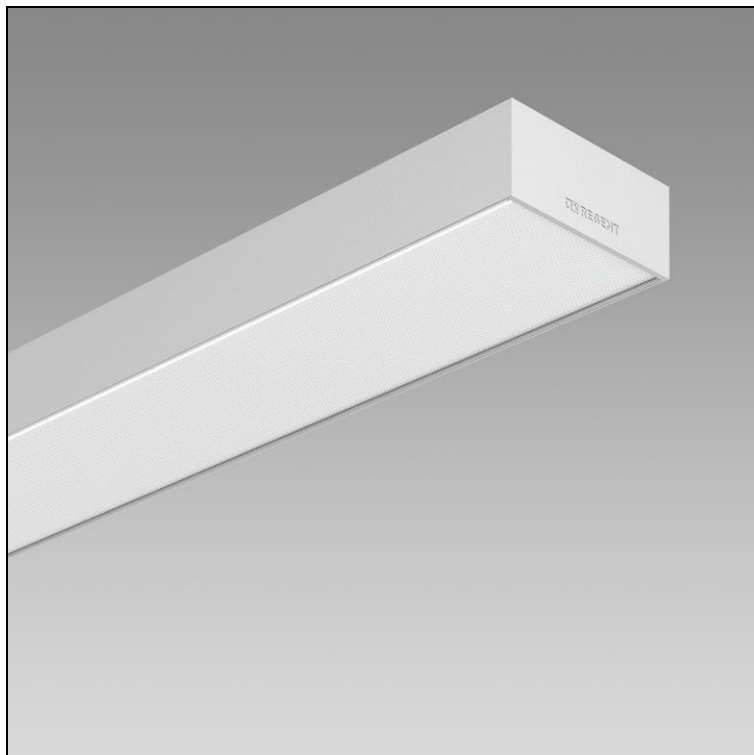

System power	30 W
Source of light	LED (Light Emitting Diode)
Colour temperature	4000 K
Luminaire flux	2400 lm
Ingress Protection	IP20
Colour Rendering Index	CRI >80
UGR C0 4H/8H	18.3
UGR C90 4H/8H	18.6
Economic life-time	L80 (B10) 50'000h
Light control	DALI
Finish	natural-colour anodised
Weight	2.294 kg

Ceiling and wall mounted luminaire Purelite D C-LED with LED (Light Emitting Diode), system power: 30 W, luminous flux of luminaire 2400 lm, CRI >80, 4000 K, neutral white, SDCM 3, L80 (B10) 50'000h, max. 3000 cd/m², 230 V, direct light emission, housing in aluminium, natural-colour anodised diffuser in synthetic material micro-prismatic CLD (Controlled Luminance Diffuser), 1 integral control gear, DALI,

protection class I, ingress protection IP20, glow wire test 650 °C, impact strength: IK 08

L = 1208 mm, B = 90 mm, H = 35 mm